



Essential Smartbright T5 Batten

BN058C LED3/NW L300 GM

Polycarbonate

BN058 Batten provide flexibility to customer to choose from 3 CCT and 4 different size and lumen packages, based on their specific need.

Product data

General information		Approval and application	
Light source color	740 neutral white	Optical cover/lens finish	Opal
Optical cover/lens type	Polycarbonate	Overall length	325 mm
Control interface	-	Overall width	21 mm
Protection class IEC	Safety class II	Overall height	32.3 mm
CE mark	-	Color	White
Number of products on MCB of 16 A type B	8	Initial performance (IEC compliant)	
Light source engine type	LED	Initial luminous flux (system flux)	300 lm
Operating and electrical		Luminous flux tolerance	+/-10%
Input Voltage	220 to 240 V	Initial LED luminaire efficacy	85 lm/W
Input Frequency	50 or 60 Hz	Init. Corr. Color Temperature	4000 K
Power Factor (Min)	0.45	Init. Color Rendering Index	>70
Controls and dimming		Initial input power	3.4 W
Dimmable	No	Power consumption tolerance	+/-10%
Mechanical and housing			
Housing Material	Polycarbonate		
Optical cover/lens material	Polycarbonate		

Essential Smartbright T5 Batten

Application conditions

Ambient temperature range -20 to +40 °C


Product data

Full product code 871016331404499
Order product name BN058C LED3/NW L300 GM
EAN/UPC - Product 8710163314044
Order code 911401709622

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	24
Material Nr. (12NC)	911401709622
Net Weight (Piece)	0.050 kg



Dimensional drawing

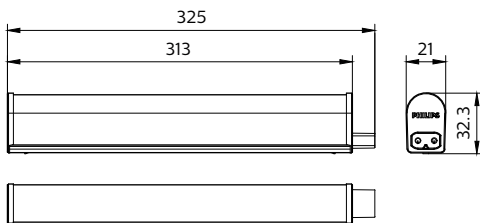

BN058C LED3/NW L300 GM

