



Plusline Compact

Plusline C 150W R7s 230V 1CT/10X10F

Mains-voltage linear lamp giving white halogen light


Product data

General Information	
Cap-Base	R7S [R7s]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Rated Lifetime (Hours)	2000 h
Light Technical	
Luminous Flux (Nom)	2400 lm
Luminous Efficacy (rated) (Nom)	16 lm/W
Color Rendering Index (Nom)	100
Operating and Electrical	
Power (Nom)	150 W
Lamp Current (Nom)	0.65 A
Starting Time (Nom)	0.0 s
Voltage (Nom)	230 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear

Cap-Base Information	10
Bulb Shape	T3 [T 12mm (T3)]
Luminaire Design Requirements	
Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	872790080887200
Order product name	Plusline C 150W R7s 230V 1CT/10X10F
EAN/UPC - Product	8727900808872
Order code	923919943202
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	100
Material Nr. (12NC)	923919943202
Net Weight (Piece)	0.005 kg
ILCOS Code	HDG//RS-150-230-R7s-74,9

Plusline Compact

Dimensional drawing

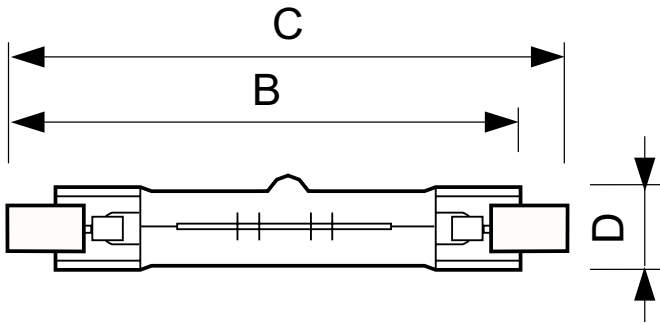

DEComp 150W R7s 230V T3 CL

Product	D (max)	B (max)	B	B (min)	C (max)
Plusline C 150W R7s 230V 1CT/ 10X10F	15 mm	76.5 mm	74.9 mm	73.3 mm	78.3 mm

