

MASTER PL-S 2 Pin

MASTER PL-S 9W/840/2P 1CT/5X10CC

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information			
Cap-Base	G23 [G23]	Luminous Flux (Nom)	590 lm
Life To 10% Failures (Nom)	6500 h	Luminous Flux (Rated) (Nom)	583 lm
Life to 50% Failures (Nom)	10000 h	Color Designation	Cool White (CW)
LSF 2000 h Rated	99 %	Chromaticity Coordinate X (Nom)	0.38
LSF 4000 h Rated	98 %	Chromaticity Coordinate Y (Nom)	0.38
LSF 6000 h Rated	95 %	Correlated Color Temperature (Nom)	4000 K
LSF 8000 h Rated	86 %	Luminous Efficacy (rated) (Nom)	67 lm/W
Flux measurement reference	Sphere	Color Rendering Index (Nom)	80
Light technical		LLMF 2000 h Rated	94 %
Color Code	840 [CCT of 4000K]	LLMF 4000 h Rated	91 %
		LLMF 6000 h Rated	89 %

MASTER PL-S 2 Pin

LLMF 8000 h Rated	86 %
Operating and electrical	
Power (Nom)	8.8 W
Lamp Current (Nom)	0.170 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Cap-Base Information	2 Pins
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	1.4 mg

Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	9 kWh
EPREL Registration Number	423591
Product data	
Full product code	871150026087170
Order product name	MASTER PL-S 9W/840/2P 1CT/5X10CC
EAN/UPC - Product	8711500260871
Order code	927936084011
Numerator - Quantity Per Pack	1
Local code description	8344530
Numerator - Packs per outer box	50
Material Nr. (12NC)	927936084011
Net Weight (Piece)	32.000 g
ILCOS Code	FSD-9/40/1B-I-G23


Dimensional drawing




MASTER PL-S 9W/840/2P 1CT/5X10CC

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 9W/840/2P 1CT/5X10CC	28 mm	13 mm	129 mm	145 mm	167 mm

Photometric data

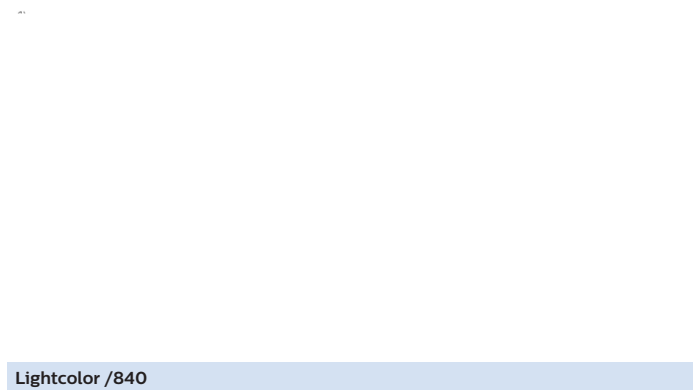


Lightcolor /840

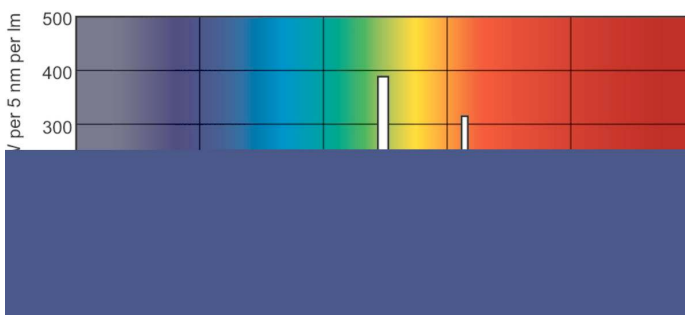

Lightcolor /840

MASTER PL-S 2 Pin

Lifetime

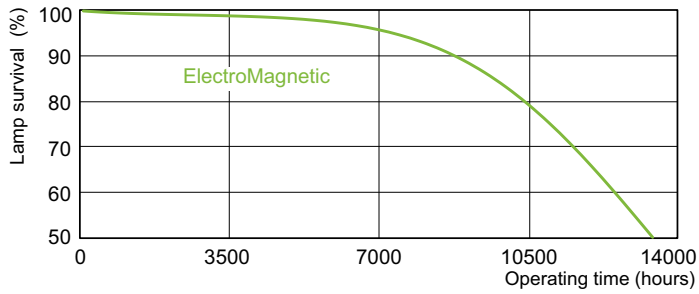

Life Expectancy 12 h cycle



Life Expectancy 3 h cycle

Lumen Maintenance 3 h + 12 h cycle

