



MASTERColour CDM-R

MASTERColour CDM-R 35W/830 E27 PAR30L 30D 1CT

Range of compact, high-efficiency, discharge reflector lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. Color 830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	5000 h
Life to 20% Failures (Nom)	8000 h
Life to 50% Failures (Nom)	8000 h
Switching Cycle	1000X
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	30 °
Beam Angle Technical (Nom)	29 °
Beam Angle Technical (Max)	36.3 °
Beam Angle Technical (Min)	21.8 °

Luminous Flux (Rated) (Nom)	2200 lm
Luminous Intensity (Nom)	7400 cd
Beam Description	Flood
Color Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	0.431
Chromaticity Coordinate Y (Nom)	0.400
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	81
LLMF At End Of Nominal Lifetime (Nom)	48 %
Luminous Flux in 90° Cone (Rated)	2000 lm
Operating and Electrical	
Power (Nom)	38 W
Lamp Current (EM) (Nom)	0.53 A

MASTERCcolour CDM-R

Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Warm Up Time to 60% Light (Nom)	120 s
Ignition Time (Max)	30 s
Voltage (Max)	94 V
Voltage (Min)	78 V
Voltage (Nom)	86 V

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	PAR30L [PAR 3.75 inch/95mm Long]

Approval and Application

Mercury (Hg) Content (Nom)	2.8 mg
----------------------------	--------

Energy Consumption kWh/1000 h	42 kWh
-------------------------------	--------


Luminaire Design Requirements

Bulb Temperature (Max)	300 °C
Cap-Base Temperature (Max)	200 °C

Product Data

Full product code	871150021170500
Order product name	MASTERCcolour CDM-R 35W/830 E27 PAR30L 30D 1CT
EAN/UPC - Product	8711500211705
Order code	928071000691
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928071000691
Net Weight (Piece)	0.216 kg
ILCOS Code	MRS/UB-35/830-H-E27-95/125/30

Dimensional drawing




CDM-R 35W/830 E27 PAR30L 30D

Product	D (max)	D	C (max)	C
MASTERCcolour CDM-R 35W/830 E27 PAR30L 30D 1CT	97 mm	95 mm	123 mm	120 mm

Photometric data

171°/190°/130°

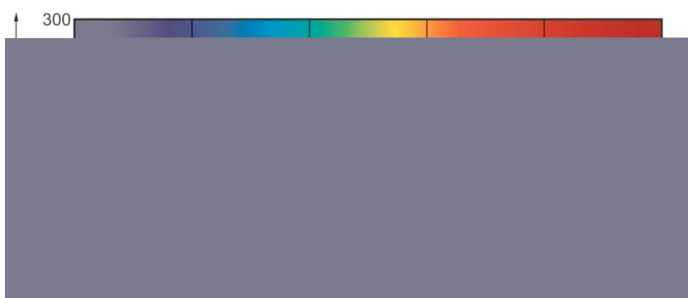


CDM-R 35W /830 PAR30L 30D

MASTERCcolour CDM-R /830

MASTERCcolour CDM-R

Lifetime

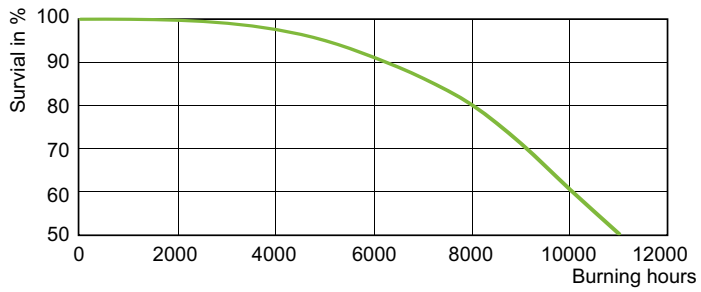

CDM-R 35W Life Expectancy /830 PAR30L

CDM-R 35W Lumen Maintenance /830 PAR30L

