



Coreline Slim Batten

BN126C LED41S/840 PSU L1200

Polycarbonate Diffuser -

The new Philips Coreline slim batten offers exceptional value. It is Perfect for your everyday lighting installations. Available in 3 standard sizes, and 2 CCTs to provide flexibility to customer.

Product data

General information	
Light source color	840 neutral white
Optical cover/lens type	Polycarbonate Diffuser
Control interface	-
Protection class IEC	Safety class I
CE mark	CE mark
Number of products on MCB of 16 A type B	45
Light source engine type	LED

Operating and electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Power Factor (Min)	0.9

Controls and dimming	
Dimmable	No

Mechanical and housing	
Housing Material	Steel
Optical cover/lens material	Polycarbonate
Optical cover/lens finish	Opal

Overall length	65 mm
Overall width	65 mm
Overall height	1135 mm
Color	White RAL 9003

Approval and application	
Ingress protection code	IP20(front IP40)
Mech. impact protection code	IK04 [0.5 J standard plus]

Initial performance (IEC compliant)	
Initial luminous flux (system flux)	4100 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	107 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial input power	38 W
Power consumption tolerance	+/-10%

Application conditions	
Ambient temperature range	-20 to +40 °C

Coreline Slim Batten


Product data

Full product code	692382863853599
Order product name	BN126C LED41S/840 PSU L1200
EAN/UPC - Product	6923828638535
Order code	911401898980
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	8
Material Nr. (12NC)	911401898980
Net Weight (Piece)	1.510 kg



Dimensional drawing

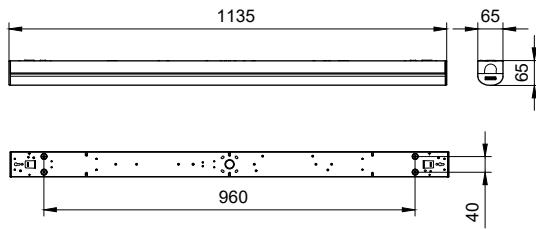

BN126C LED41S/840 PSU L1200

