



MASTER TL5 High Efficiency

MASTER TL5 HE 21W/840 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap-Base	G5 [G5]	Luminous Flux (Rated) (Nom)	1850 lm
Life to 50% Failures Preheat (Nom)	24000 h	Color Designation	Cool White (CW)
Features	na [Not Applicable]	Luminous Efficacy (@ Max Lumen, Rated) (Nom)	101 lm/W
System Description	High Efficiency	Chromaticity Coordinate X (Nom)	0.38
LSF Preheat 2000 h Rated	99 %	Chromaticity Coordinate Y (Nom)	0.38
LSF Preheat 4000 h Rated	99 %	Correlated Color Temperature (Nom)	4000 K
LSF Preheat 6000 h Rated	99 %	Luminous Efficacy (rated) (Nom)	90 lm/W
LSF Preheat 8000 h Rated	99 %	Color Rendering Index (Max)	85
LSF Preheat 16000 h Rated	97 %	Color Rendering Index (Min)	80
LSF Preheat 20000 h Rated	84 %	Color Rendering Index (Nom)	80
Flux measurement reference	Sphere	LLMF 2000 h Rated	96 %
		LLMF 4000 h Rated	95 %
		LLMF 6000 h Rated	94 %
		LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
Light Technical			
Color Code	840 [CCT of 4000K]		
Luminous Flux (Nom)	1900 lm		

MASTER TL5 High Efficiency

LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Nom)	20.8 W
Lamp Current (Nom)	0.165 A
Temperature	
Design Temperature (Nom)	35 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	Green Plate
Bulb Shape	T5 [16 mm (T5)]
Approval and Application	
Energy Efficiency Class	G

Mercury (Hg) Content (Max)	1.4 mg
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	21 kWh
EPREL Registration Number	423455
Product Data	
Full product code	871150063944855
Order product name	MASTER TL5 HE 21W/840 SLV/40
EAN/UPC - Product	8711500639448
Order code	927926284055
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927926284055
Net Weight (Piece)	79.200 g
ILCOS Code	FDH-21/40/1B-L/P-G5-16/850



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 21W/840 SLV/40	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm

TL5 21W/840/GP HE

Photometric data

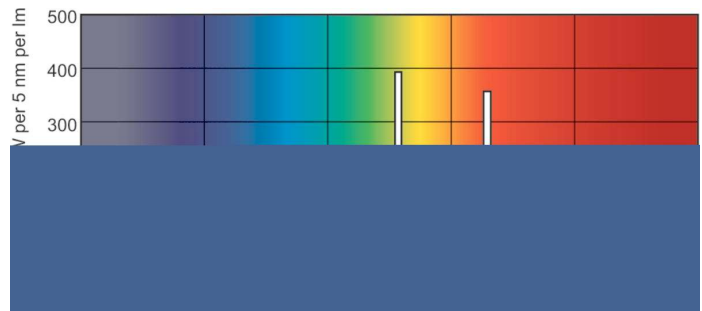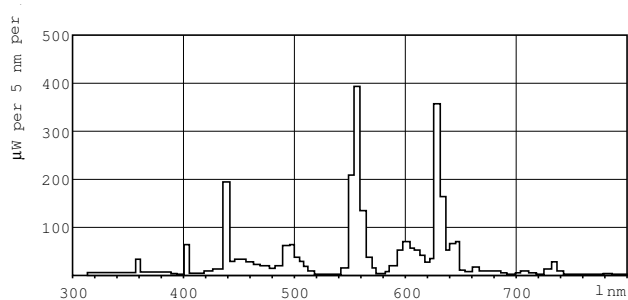

Lightcolor /840

Lightcolor /840

MASTER TL5 High Efficiency

Lifetime



MASTER TL5 HE Life Expectancy 3 h cycle

MASTER TL5 HE Life Expectancy 12 h cycle



MASTER TL5 HE Lumen Maintenance 3 h + 12 h cycle

